

Models:

SENW6: Wall Mounted Detector and Remote Adjuster

SENW6**Wall Mounted Detector
and Remote Adjuster****Specifications****Connecting Cable**

- 2 x Two core screened cable

Wiring Identification For SENW6 Sensor

- | | |
|---|-----------------|
| 3 | Setpoint Adjust |
| 4 | Setpoint Adjust |

Adjuster

- | | |
|----|------------|
| 9 | Thermistor |
| 10 | Thermistor |

Temperature Ratings

- | | |
|------------|------------------------|
| Storage: | 0-50°C non-condensing |
| Operating: | 10-40°C non-condensing |

Enclosure

Manufactured from an ignition resistant grade of ABS which meets the requirements of AS2420.

Colour: Off White

Installation

1. Mount the base to the wall with four screws through the holes provided in the base of the case.

 Ensure that the word "UP" is to the top.

2. Wire in accordance with INNOTECH connection diagrams and local bylaws or refer to your local distributor.
3. Fit the cover by placing the top edge of the cover over the tabs on the top of the base and then pressing the bottom middle of the cover to the wall. A firm click indicates that the cover is securely fixed.

Wiring


Shielded cable should be used to reduce the problem of EMI (electro-magnetic interference). The shield should remain continuous from the SENW6 to the controller.

It is good practice to maintain at least 50 millimetre clearance between control circuit wiring and power wiring.

Removing The Cover:

Grip the bottom of the sides of the cover and then lift the cover off the wall. It will come free of the base with a minimum of force.

DO NOT grip cover by the middle of the sides. This will cause the cover to grip more firmly to the base.

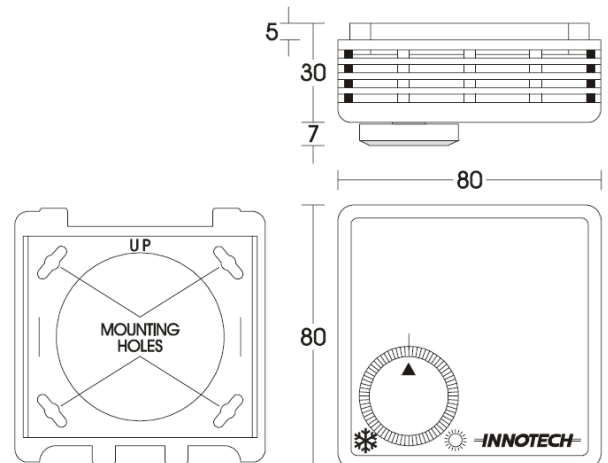**Application**

The INNOTECH SENW6 Sensor is designed to provide a wall mount temperature sensor and an unscaled means to manually adjust the Set Point of the INNOTECH range of Digital controllers.


Features

- Attractively styled low profile case blends with any decor
- Cover secured by positive locking clips
- No unsightly screws

STANDARD CONNECTION

SENW6

DIGITAL CONTROLLER

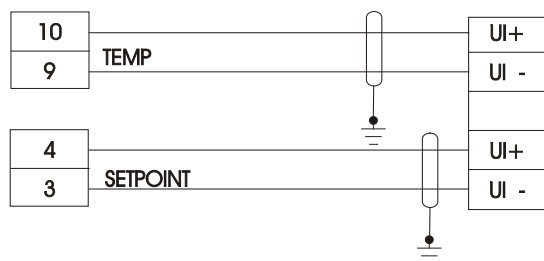

Screened Cable should be used to reduce EMI.

INNOTECH®

Australian Owned, Designed & Manufactured
by Mass Electronics Brisbane

Phone: +61 7 3421 9100 **Fax:** +61 7 3421 9101
Email: sales@innotech.com.au www.innotech.com.au

YOUR DISTRIBUTOR